

Series DBS

Slip-On Check Valve

The series DBS rubber check valve effectively ensures mono-directional flow of slurries, sewerage, sludge and other hard to handle fluids.

The valve consists of an elastomer duckbill with a slip-on connection. This simple rugged design eliminates the mechanical parts which can wear and jam in conventional check valves.




Performance Features:

- Low pressure drop.
- Corrosion resistant
- Frost proof
- Silent operation.

Options:

- Sleeve Elastomer
- 316 Stainless steel pipe clamps

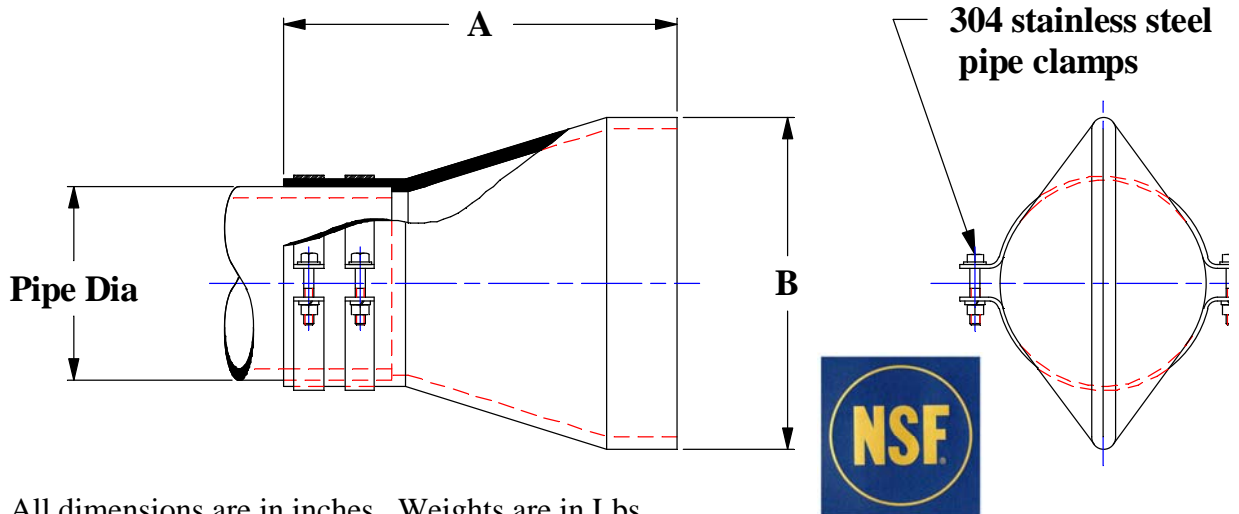

All dimensions are in inches. Weights are in Lbs.

Size	1	1.5	2	2.5	3	4	5	6	8	10	12
A	3.00	6.00	6.00	8.00	8.50	12.00	14.00	12.50	17.00	25.00	28.00
B	2.00	3.50	4.00	5.00	6.25	7.87	11.00	12.50	14.75	19.00	21.00
Wt, lb	3	4	5	8	10	15	17	20	25	35	60

Size	14	16	18	20	24	30	36	42	44	54	60
A	31.50	37.00	39.00	43.00	49.00	66.00	58.00	72.00	72.00	84.00	91.00
B	25.50	29.00	32.00	36.50	43.00	55.50	61.00	71.00	78.00	84.00	97.00
Wt, lb	75	120	140	300	400	550	850	950	1,125	1,300	1,700

ONYX VALVE CO

835 Industrial Hwy
P: 856-829-2888
www.onyxvalve.com

Cinnaminson NJ 08077
Fx: 856-829-3080